



TRUCK MOUNTED CRANE

# RHINO BS 415

Exceptional Precision and Superior Lifting Capacity





[www.rhinocrane.my](http://www.rhinocrane.my)

# GALLERY



## STANDARD FEATURE


- **Design in accordance with EN12999**
- Built with High Tensile Steel
- Hydraulic Stabilizer with tilted angle
- Double Section Stabilizer (2,700 mm + 2,700 mm)
- European made Load Holding Valves
- Danfoss Control Valve
- Power Linkage
- Oil Cooler
- Oil Tank
- Assembly Kit

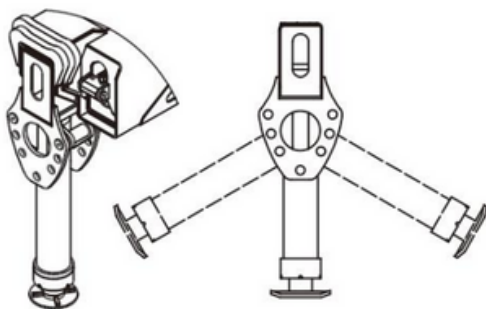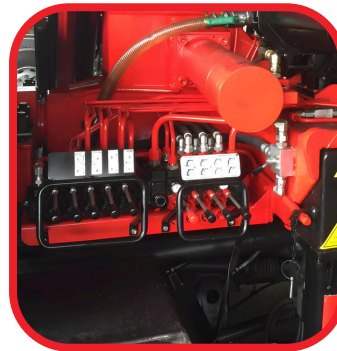

Hydraulic Stabilizer with adjustable position and tilted angle represents an advanced solution for stability challenges, offering adaptability and reliability across a range of industries and scenarios.

Furthermore, Extra Long Hydraulic Stabilizer with each side measuring 2700mm, represents an extended and robust solution for achieving stability in diverse applications.

# LOAD DIAGRAMS

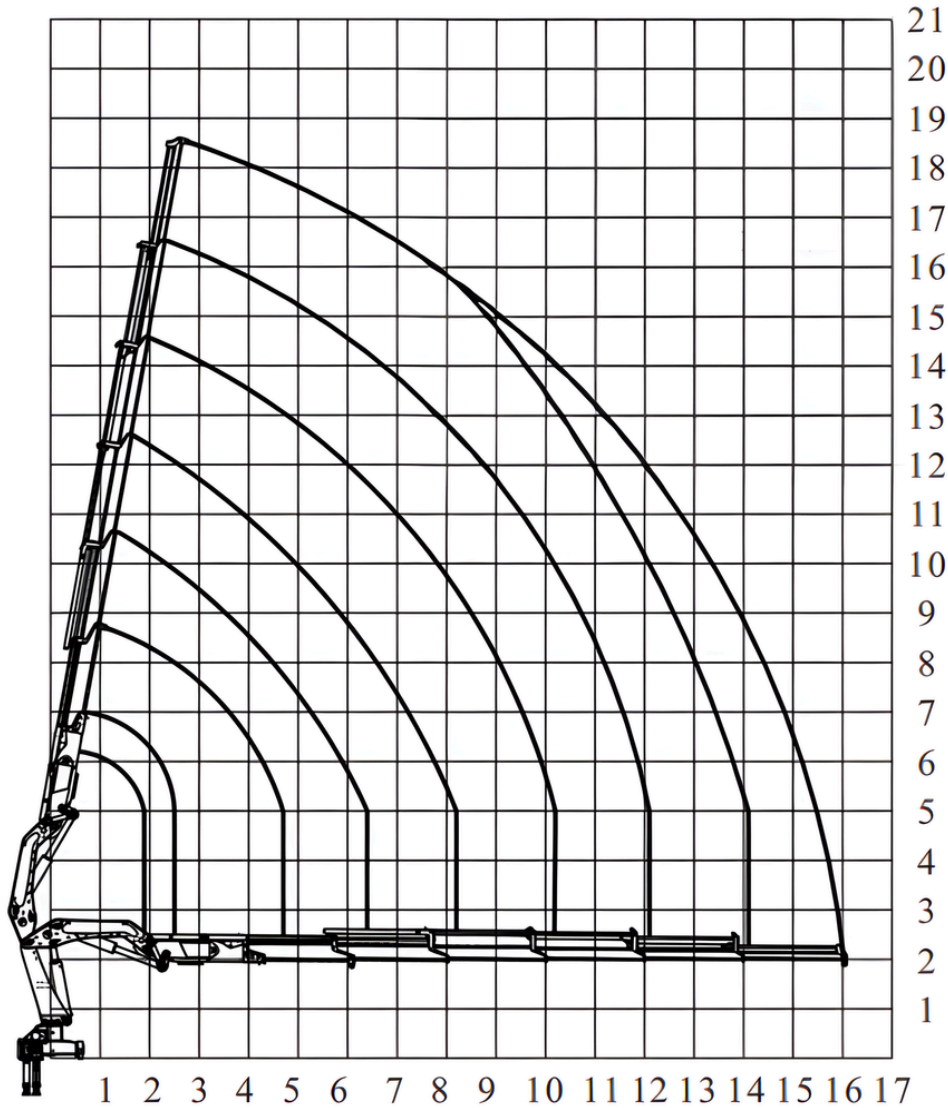

## 415-4

M	4.3	6.2	8.1	10.1	12.0
Kg	8,500	5,800	4,400	3,600	2,900





## 415-5

M	4.3	6.3	8.1	10.1	12.0	14.0
Kg	8,200	5,500	4,200	3,400	2,700	2,300

## 415-6

M	4.4	6.4	8.2	10.2	12.1	14.1	16.0
Kg	8,080	5,300	4,100	3,300	2,600	2,200	2,000

# DIMENSIONS

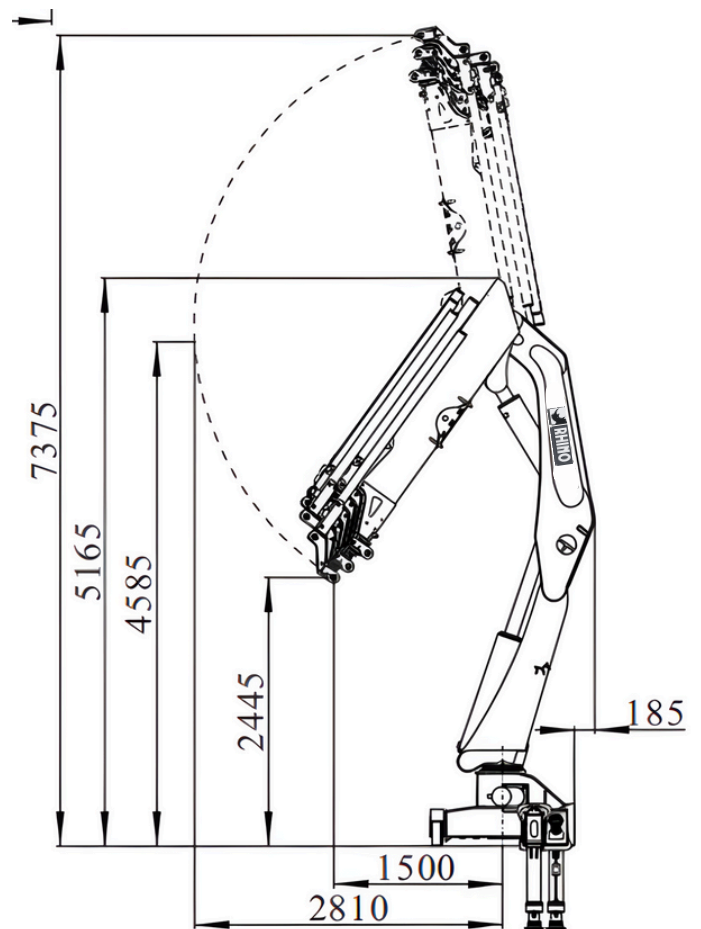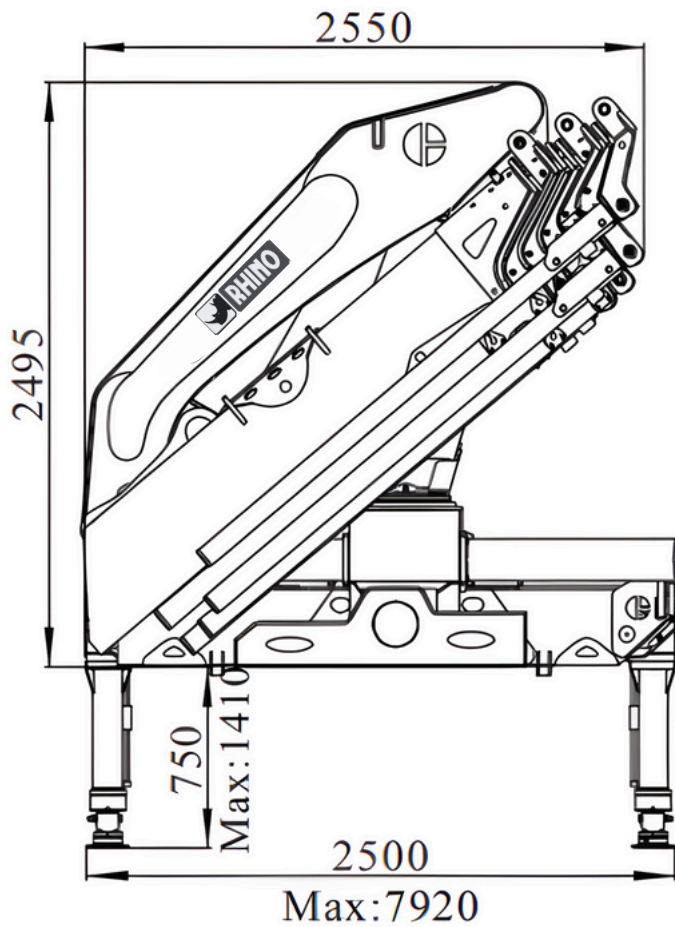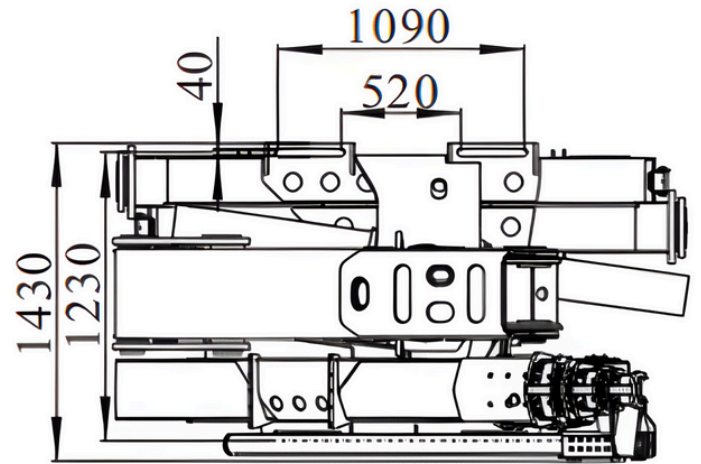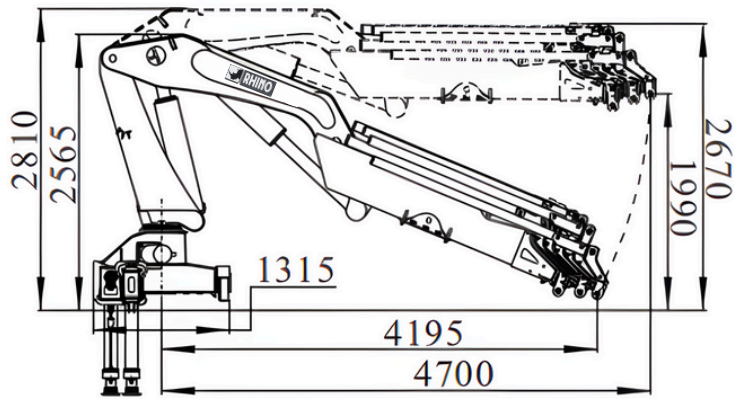

# TECHNICAL SPECIFICATIONS

	<b>RHINO BS 415 - 4</b>	<b>RHINO BS 415 - 5</b>	<b>RHINO BS 415 - 6</b>
Lifting Capacity (tm)	<b>41</b>	<b>40.5</b>	<b>40</b>
Slewing Angle (°)	<b>385</b>	<b>385</b>	<b>385</b>
Pressure (bar)	<b>320</b>	<b>320</b>	<b>320</b>
Oil Tank Capacity (L)	<b>200</b>	<b>200</b>	<b>200</b>
Stabilizer Spread (mm)	<b>2,700</b>	<b>2,700</b>	<b>2,700</b>
Crane Weight with Stabilizer (kg)	<b>5,130 ± 5%</b>	<b>5,300 ± 5%</b>	<b>5,450 ± 5%</b>

# ACCESSORIES


**RADIO REMOTE CONTROL**


**WINCH**


**REAR STABILIZER**


**TOP SEAT**



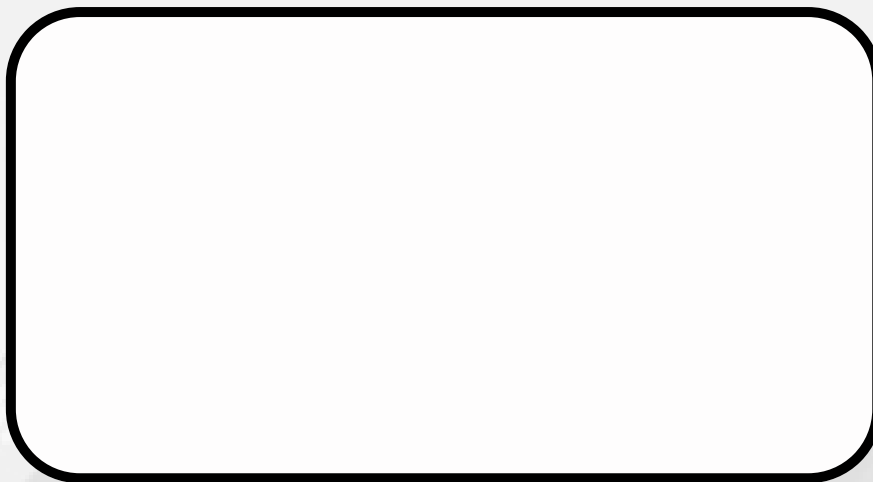

**RHINO MACHINERY SDN BHD**  
**(1097988-X)**



 +603-6038 6866

 +6019-279 8373 / +6016-210 1461

 rhinomachinery.co@gmail.com

 www.rhinocrane.my